

OL11 Series Filters

PRODUCT DATA SHEET

Opti-Lok™ dedicated filters for enhanced removal efficiency

PRODUCT DESCRIPTION

The OL11 series filters from GPS Air are specifically optimized to work with Opti-Lok products such as the PF-e® and PF-i®. These fully synthetic non-shedding microfiber mini-pleat panel filters provide up to 5 times the amount of media of most pleated filters of the same size. This high loading capacity means a longer service life and fewer filter changes.

COMBINED OPTI-LOK SYSTEM PERFORMANCE


When combined with either a PF-e or a PF-i, it is more efficient at removing contaminants of concern in urban areas. For E1 bin particles such as wildfire smoke amongst others, filter removal performance is equivalent to that of a standard MERV 13 filter.

STANDARD FEATURES

- Opti-Lok technology approved
- Waterproof and Impact Resistant media construction
- Inherent antimicrobial properties
- Non-shedding microfiber media
- Heavy duty moisture resistant beverage board frame
- Upstream and downstream crosshatch for extra strength
- 100% polypropylene spacer beads for media rigidity.

SPECIFICATIONS

Certification	UL 900 Class 1
Initial dP @ 700/1060/1300/1968 cfm	0.06" / 0.10" / 0.13" / 0.22" (WG)
Lifespan	Up to 1 year or 1.50" WG in pressure drop

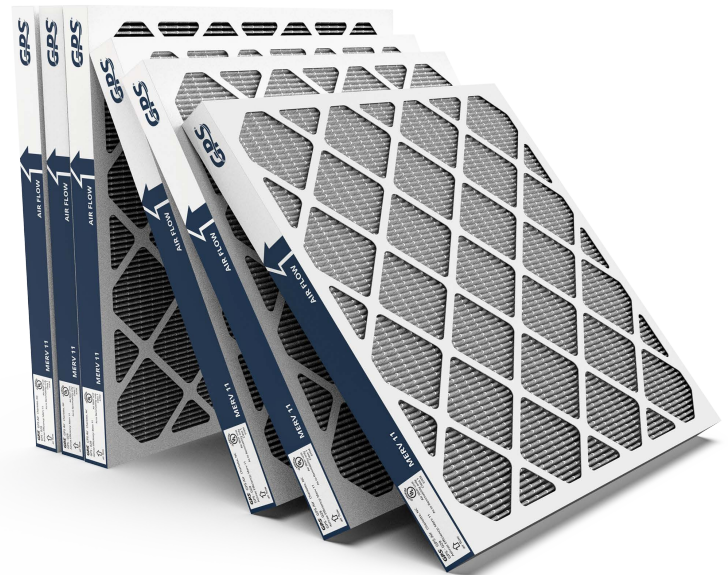

AVAILABLE SIZES

OL11-12242	12" x 24" x 2"
OL11-16202	16" x 20" x 2"
OL11-16242	16 x 24" x 2"
OL11-16252	16" x 25" x 2"
OL11-20102	20" x 10" x 2"
OL11-20202	20" x 20" x 2"
OL11-20252	20 x 25" x 2"
OL11-24202	24" x 20" x 2"
OL11-24242	24" x 24" x 2"