

Closed Loop Clean Air System


PRODUCT DESCRIPTION

smartIAQ® GridSet™ is an on-demand air cleaner for commercial spaces. It supports the easy application of the Indoor Air Quality Procedure (IAQP) by extracting design compounds listed in ASHRAE Standard 62.1-2019 and -2022. With low voltage power, occupant-based response, and low weight modules for “drop in” to ceiling grid systems, smartIAQ GridSet delivers immediate return on investment and supports ongoing savings with low service, installation, and design costs. Standard-sized filters and the smartIAQ operating system provide 2 years of maintenance-free operation. Status indicator, air quality sensor, and filter access are in the space, ensuring confident ownership and maintenance.


Suitable for classrooms, meeting rooms, retail stores, houses of worship, and some medical facilities, one smartIAQ GridSet cleans air in spaces up to 1,500ft². Multiple units may be used to help larger spaces achieve compliance.

STANDARD FEATURES

- Fan and Filter Modules
- Integral EC Blower - varies up to a Peak Clean flow of 150CFM to allow up to 50% outdoor air reduction
- Virtually silent operation - NC26 at max flow
- Low weight modules for drop ceiling grids: does not require supplemental support (see IOM for more details)
- 48VDC low voltage power: uses CAT-5e or CAT-6 wiring to a power hub (separate device)
- Filter and operating profile provides closed loop for IAQP compliance
- Solid state motion and air quality sensors: no calibration or maintenance required
- Standalone operation: no costly coordination or programming necessary

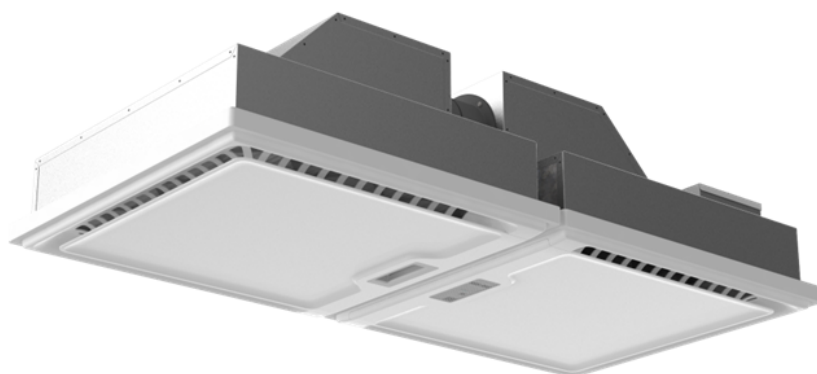

Single Zone



OPTIONAL FEATURES

- NPBI® Soft Ionization delivered to space at supply side
- Digital BMS integration via modbus RTU Protocol
- BACnet Gateway to augment modbus
 - MS/TP (RS-485) or IP (Ethernet)

FILTRATION DETAILS

The SIAQ2-DIST1S utilizes a hybrid Particulate and Molecular combined filter to address defined design compounds.


The Base Level Kit (SIAQ-TMK-20202) is included, which consists of:

Qty 1 (one) 2" Tri-Media Filter

Ashrae 52.2 rated to MERV 8


Ashrae 145.2 rated for gas-phase contaminants

Unit achieves 2 years of filter life*


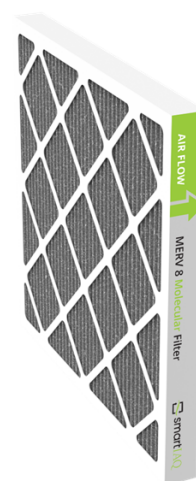


*Based on ASHRAE published generation rates for design compounds


Closed Loop Clean Air System

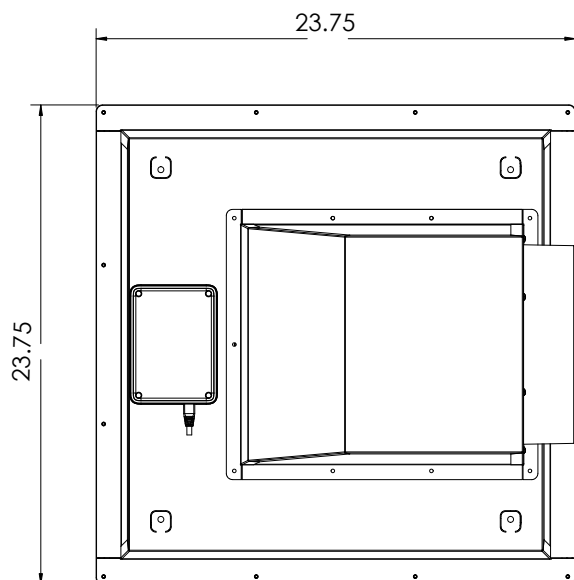

Plan View

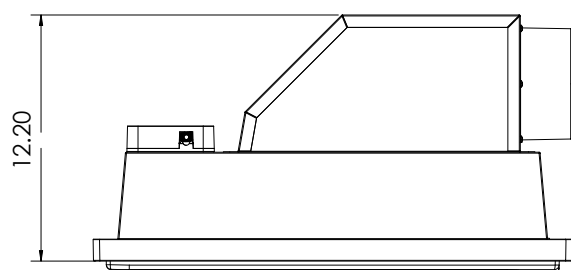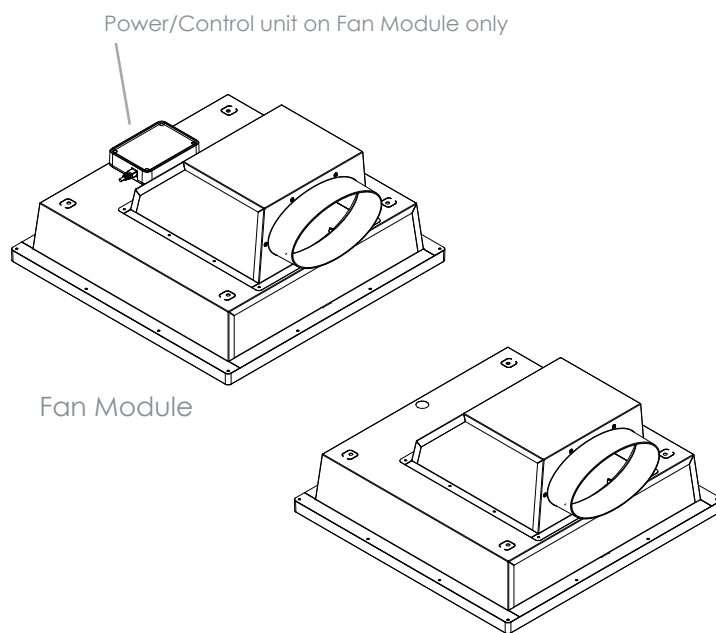

Side Elevation

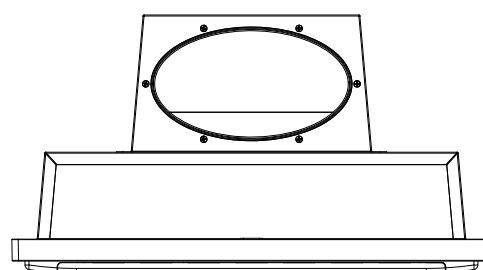

End Elevation

Overall dimensions representative of Fan and Filter Modules

SIAQ2: SPECIFICATIONS

Standard Input Voltage	48 VDC	Fan Module Weight	<26 lbs
Airflow Capacity	Up to 150 CFM	Filter Module Weight	<26 lbs
Sound Level** (Nominal Cleaning)	NC-26	Power Consumption	50 W (Max)
Filter Life*	2 years*	Temperature Range	0 - 140 F
Fan Module Dimensions (L x W x H)	23.75" x 23.75" x 12.2"	Humidity Range	5 - 85% RH (non-condensing)
Filter Module Dimensions (L x W x H)	23.75" x 23.75" x 12.2"	Compliance and Certifications#	UL 867, UL 2998, CARB

** 1m from unit, # Certifications Pending

© 2025 GPS Air

GPS Air is the owner of certain trademarks that appear in our materials. Please visit www.gpsair.com/trademarks for a list of our marks.

GPS-040-47-R20-5GS